

P19601.P01

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.

P19601

Total Pages

 Inventor(s) or Application Identifier
Koichi SATO

 Title: PHOTOGRAPHING OPERATION CONTROL DEVICE
FOR ELECTRONIC STILL CAMERA

ADDRESS TO:

 Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

APPLICATION ELEMENTS

1. ☒ Fee Transmittal Form
2. ☒ Specification [Total Pages 21]
(preferred arrangement set forth below)
- Descriptive title of the Invention
- Cross References to Related Applications
- Statement Regarding Fed sponsored R & D
- Reference to Microfiche Appendix
- Background of the Invention
- Brief Summary of the Invention
- Brief Description of the Drawings (if filed)
- Detailed Description
- Claim(s)
- Abstract of the Disclosure
3. ☒ Drawing(s) (35 USC 113) [Total Sheets 5]
4. ☒ Oath or Declaration [Total Pages 3]
a. ☒ Newly executed (original or copy) ☐ Unexecuted
b. ☐ Copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional with Box 18 completed)
[Note Box 5 below]
i. ☐ **DELETION OF INVENTOR(S)**
Signed statement attached deleting inventor(s)
named in the prior application, see 37 CFR 1.63(d)(2)
and 1.33(b).
☐ Incorporation By Reference (useable if Box 4b is checked)
The entire disclosure of the prior application, from which a copy
of the oath or declaration is supplied under Box 4b, is considered
as being part of the disclosure of the accompanying application
and is hereby incorporated by reference therein.
☐ Microfiche Computer Program (Appendix)
Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)
a. ☐ Computer Readable Copy
b. ☐ Paper Copy
c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

8. ☒ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney
(when there is an assignee)
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
14. ☐ Small Entity Statement(s) ☐ Statement filed in prior application,
Status still proper and desired
15. ☐ The prior application is assigned of record to _____.
16. ☒ Foreign priority claimed
a. ☒ Claim of Priority
b. ☒ Certified Copy of Priority Document(s)
17. ☐ Other: _____

18. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior Application No. _____/_____, filed _____.
19. ☐ Amend the specification by inserting before the first line the sentence:
 This application is a continuation-in-part, continuation, division, of Application No. _____/_____, filed _____.

Address all future correspondence to Customer No. 7055 at the present address of:

 GREENBLUM & BERNSTEIN, P.L.C.
1941 Roland Clarke Place
Reston, VA 20191
(703) 716-1191

Date

Signature

Bruce H. Bernstein, Reg No. 29,027

Typed or Printed Name

Application Number	Not Yet Assigned
Filing Date	Concurrently Herewith
First Named Inventor	K. SATO
Group Art Unit	Unknown
Examiner Name	Unknown
Attorney Docket Number	P19601

TOTAL AMOUNT OF PAYMENT	(\$)730.00
--------------------------------	-------------------

METHOD OF PAYMENT (check one)

1. ☒ The Commissioner is hereby authorized to charge indicated fees and credit any over payments to:

Deposit Account Number 19-0089

Deposit Account Name GREENBLUM & BERNSTEIN

Deposit Account Name GREENBLUM & BERNSTEIN,
P.L.C.

☒ Charge Any Additional Fee Required Under 37 CFR 1.16 and 1.17, including any required extension of time fees in any concurrent or future reply requiring a petition for extension of time for its timely submission (37 CFR 1.136(a)(3))

☐ Charge the Issue Fee Set in 37 CFR 1.18 at the Mailing of the Notice of Allowance, 37 CFR 1.311(b)

2. ☒ **Payment Enclosed:**

☒ Check ☐ Money Order ☐ Other**FEE CALCULATION** (fees effective 11/13/99)

1. FILING FEE

Large Entity Fee Code	Entity Fee (\$)	Small Entity Fee Code	Entity Fee (\$)	Fee Description	Fee Paid
101	690	201	345	Utility filing fee	<u>690</u>
106	310	206	155	Design filing fee	<u> </u>
107	480	207	240	Plant filing fee	<u> </u>
108	690	208	345	Reissue filing fee	<u> </u>
114	150	214	75	Provisional filing fee	<u> </u>

SUBTOTAL (1) (\$) 690

2. CLAIMS

		Extra	below	Fee Paid
Total Claims	11 -20=	0	x 18	= 0
Independent	1 -3=	0	x 78	= 0
Claims				
Multiple Dependent Claims			x 260	= 0

Large Fee Code	Entity Fee (\$)	Small Fee Code	Entity Fee (\$)	Fee Description
103	18	203	9	Claims in excess of 20
102	78	202	39	Independent claims in excess of 3
104	260	204	130	Multiple dependent claim
109	78	209	39	Reissue independent claims over original patent
110	18	210	9	Reissue claims in excess of 20 and over original patent

SUBTOTAL (2)	(\$)	0.00
---------------------	-------------	-------------

FEE CALCULATION (continued)

3. ADDITIONAL FEES

Large Code	Entity Fee (\$)	Small Code	Entity Fee (\$)	Fee Description	Fee Paid
105	130	205	65	Surcharge - late filing fee or oath	
127	50	227	25	Surcharge - late provisional filing fee or cover sheet	
139	130	139	130	Non-English specification	
147	2,520	147	2,520	For filing a request for reexamination	
112	900*	112	900*	Requesting publication of SIR	
				Prior to Examiner action	
113	1,840*	113	1,840*	Requesting publication of SIR after Examiner action	
115	110	215	55	Extension for response within 1st month	
116	380	216	190	Extension for response within 2nd month	
117	870	217	435	Extension for response within 3rd month	
118	1,360	218	680	Extension for response within 4th month	
128	1,850	228	925	Extension for response within 5th month	
119	300	219	150	Notice of Appeal	
120	300	220	150	Filing a brief in support of an appeal	
121	260	221	130	Request for oral hearing	
138	1,510	238	1,510	Petition to institute a public use proceeding	
140	110	240	55	Petition to revive unavoidably abandoned application	
141	1,210	241	605	Petition to revive unintentionally abandoned application	
142	1,210	242	605	Utility issue fee (or reissue)	
143	430	243	215	Design issue fee	
144	580	244	290	Plant issue fee	
122	130	122	130	Petitions to the Commissioner	
123	50	123	50	Petitions related to provisional applications	
126	240	126	240	Submission of IDS	
581	40	581	40	Recording each patent assignment per property (times number of properties)	40
146	760	246	380	Filing a submission after final rejection (37 CFR 1.129(a))	
149	760	249	380	For each additional invention to be examined (37 CFR 1.129(b))	
Other fee (specify) _____					
Other fee (specify) _____					
SUBTOTAL (3) (\$)					40

*Reduced by Basic Filing Fee paid

SUBTOTAL (3) (\$) 40

SUBMITTED BY

Typed or Printed Name	Bruce H. Bernstein
-----------------------	--------------------

Signature _____

Date _____

Complete (if applicable)

Reg. Number	29.027
-------------	--------

Deposit Account User ID

PHOTOGRAPHING OPERATION CONTROL DEVICE
FOR ELECTRONIC STILL CAMERA

BACKGROUND OF THE INVENTION

5 1. Field of the Invention

The present invention relates to a device provided in an electronic still camera and more particularly to a device which controls a photographing operation.

2. Description of the Related Art

10 Conventionally, in an electronic still camera, an image signal corresponding to an image obtained through a photographing optical system, is generated in a solid state imaging device (CCD), from which the image signal is read, and the image signal is temporarily stored in a buffer memory.

15 When image data of one frame is stored in the buffer memory, the image data is read from the buffer memory and transferred to a recording medium in which the image data is recorded. Thus, in a photographing operation, a series of operations including a storing operation, a transferring operation and

20 a recording operation are essential. Therefore, when a recording medium is not in place, or when a necessary blank recording area does not exist even if the recording medium is in place, the photographing operation cannot be performed.

25 Therefore, in a case such as a test photographing operation, in which it is not necessary to record the image

data in the recording medium, it is necessary that a recording medium having a sufficient blank recording area is in place in the camera body. Further to the test photographing operation, an unnecessary image data should be deleted after performing the storing, transferring and recording operations, and thus, the next test photographing operation cannot be promptly initiate.

SUMMARY OF THE INVENTION

Therefore, an object of the present invention is to provide a photographing operation control device for an electronic still camera, which can perform a photographing operation even when a recording medium is not mounted or a blank recording area is not sufficient.

According to the present invention, there is provided a photographing operation control device for an electronic still camera, the device comprising a buffer memory and a blank photographing operation performing processor.

In the buffer memory, image data obtained through a photographing optical system is temporarily stored. The blank photographing operation performing processor performs a photographing operation in a blank photographing mode in which the image data is stored only in the buffer memory.

BRIEF DESCRIPTION OF THE DRAWINGS

The objects and advantages of the present invention will be better understood from the following description, with

reference to the accompanying drawings, in which:

Fig. 1 is a perspective view of an electronic still camera, which is viewed from the back, the camera having a photographing operation control device of a first embodiment of the present invention;

Fig. 2 is a block diagram of the electronic still camera, which shows mainly an electric construction; and

Figs. 3A, 3B and 3C show a flow chart of a photographing operation control routine.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

The present invention will be described below with reference to the embodiments shown in the drawings.

Fig. 1 is a perspective view of an electronic still camera, which is viewed from the back, the camera having a photographing operation control device of a first embodiment of the present invention.

The electronic still camera is a single-lens reflex camera, and an interchangeable lens 11 is detachably connected to the camera body 90. An optical view-finder 91 is provided on the center of the upper surface of the camera body 90. A liquid crystal display panel 46 is provided at the center of the rear surface of the camera body 90, so that a still image, which is stored in a buffer memory 40 (see Fig. 2) by a photographing operation, can be indicated on the liquid crystal display panel 46.

When viewing the camera body 90 from the side of the rear surface 92, a shutter button 93 and a condition indicating device 55 are provided on an upper-right portion of the camera body 90. The condition indicating device 55 includes a liquid crystal display panel, by which various kinds of setting conditions of the electronic still camera are indicated as a character or symbol. A photographing mode set switch 97 and a record switch 98 are provided close to the condition indicating device 55. As described later, the photographing mode set switch 97 is operated so that a photographing operation is switched between a normal photographing mode and a blank photographing mode, and the record switch 98 is operated so that an image data stored in the buffer memory 40 (see Fig. 2) is transmitted to a PC card.

A card slot 96 is formed in a side surface of the camera body 90. The card slot 96 is provided for inserting a recording medium, such as a PC card or a memory card, into the camera body 90, and a card connector (not shown), to which the recording medium is attached, is provided in the card slot 96.

Fig. 2 is a block diagram of the electronic still camera, showing mainly an electrical construction.

The interchangeable lens 11 is electrically connected to an electric circuit provided in the camera body 90 (see Fig. 1) through mount pins 12 and 13. A front lens group 14 and a rear lens group 15, which form a photographing optical

system of the electronic still camera, are mounted in a lens barrel of the interchangeable lens 11, and an aperture 16 is provided between the lens groups 14 and 15. Each of the lens groups 14 and 15 is displaced in the optical axis direction under control of a lens control circuit 17, so that a focusing adjustment can be carried out. The lens control circuit 17 is operated in accordance with a control signal transmitted through the mount pin 12 from the system controller 31 provided in the camera body. The aperture 16 is operated in accordance with a control signal transmitted through the mount pin 13 from an aperture drive circuit 32 provided in the camera body, so that the opening degree of the aperture 16 is adjusted. The aperture drive circuit 32 is controlled by the system controller 31.

In the camera body, a quick return mirror 21 is disposed on the optical axis of the lens groups 14 and 15. The quick return mirror 21 is rotatable between an inclined state shown in the drawing and a horizontal state in which the quick return mirror 21 is rotated upward. A focusing glass 22 is provided above the quick return mirror 21, and a pentagonal prism 23 is arranged above the focusing glass 22. An eyepiece lens 24 of a view-finder is disposed behind the pentagonal prism 23.

A shutter 25 is provided behind the quick return mirror 21, and an infrared cut filter 26 and an optical low-pass filter

27 are arranged behind the shutter 25. A CCD (i.e., an imaging device) 33 is provided behind the optical low-pass filter 27. Namely, the quick return mirror 21, the shutter 25, the infrared cut filter 26 and the CCD 33 are aligned on the optical axis of the lens groups 14 and 15.

A rotating operation of the quick return mirror 21 is driven by a mirror drive circuit 34, and an open-close operation of the shutter 25 is driven by the shutter drive circuit 35. The mirror drive circuit 34 and the shutter drive circuit 35 are controlled by the system controller 31.

Usually, the mirror 21 is set to an inclined state, so that light passing through the interchangeable lens 11 is led to the pentagonal prism 23. In this state, the shutter 25 is closed, so that an optical path to the CCD 33 is shut or closed. Conversely, when a photographing operation is carried out, the mirror 21 is upwardly rotated under control of the mirror drive circuit 34 and set to the horizontal state. With the rotation of the mirror 21, the shutter 25 opens under control of the shutter drive circuit 35 so that light passing through the interchangeable lens 11 is radiated on a light receiving surface of the CCD 33. Namely, an image obtained through the lens groups 14 and 15 is formed on the light receiving surface, and thus, an image signal corresponding to the image, is generated in the CCD 33.

A pulse signal generator (PPG) 36 is connected to the

system controller 31, so that the pulse signal generator 36 generates various kinds of pulse signals under control of the system controller 31. Based on these pulse signals, the CCD drive circuit 37, an A/D converter 38 and an image signal processing circuit 39 are driven, and operation of the CCD 33 is controlled by the CCD drive circuit 37. Namely, the image signal read from the CCD 33 is converted to digital image data by the A/D converter 38, and is then subjected to a predetermined process by the image signal processing circuit 39. A buffer memory 40, having a capacity large enough to store a frame of digital image data, is connected to the image signal processing circuit 39.

A monitor interface 41 and a card interface 42 are connected to the image signal processing circuit 39. These interfaces 41 and 42 are controlled by the system controller 31. A back light 45 and the liquid crystal display panel (LCD) 46 are connected to the monitor interface 41 through a liquid crystal display drive circuit 44. Based on the image data read from the buffer memory 40, the liquid crystal display drive circuit 44 is controlled so that the still image is indicated by the liquid crystal display panel 46, as described above. A card connector 47 is connected to the card interface 42, and a PC card 43 is attached to the card connector 47.

An AF sensor 51 and a photometry sensor 52 are connected to the system controller 31. The AF sensor 51 has a known

construction, from which the focusing condition of the lens groups 14 and 15 is sensed. A photometry is performed using the photometry sensor 52, so that the opening degree of the aperture 16 in an exposure and an electric charge accumulation period (i.e., an exposure period) of the CCD 33 are determined.

A photometry switch 53, a release switch 54 and the condition indicating device 55 are connected to the system controller 31. The photometry switch 53 is turned ON by partly depressing the shutter button 93, so that a photometry is carried out by the photometry sensor 52. The release switch 54 is turned ON by fully depressing the shutter button 93, hence activating the mirror drive circuit 34 and the shutter drive circuit 35 as previously described. Namely, the CCD 33 is exposed, and thus an image signal corresponding to an image is generated in the CCD 33.

The photographing mode set switch 97, the record switch 98 and the other operation switches 99 are connected to the system controller 31.

Figs. 3A, 3B and 3C show a flow chart of a photographing operation control routine of the electronic still camera. The photographing operation control routine is executed in the system controller 31, and is started by turning ON a main switch (i.e., an electric power switch) of the electronic still camera.

In Step 101, a photographing mode flag F1 is set to an

initial value "0". As described later, the photographing mode flag F1 is set to "1" when the normal photographing mode is selected, and is set to "0" when the blank photographing mode is selected. In Step 102, it is determined whether the PC card (i.e., a recording medium) 43 is attached to the card connector 47. The attachment is sensed by detecting a voltage value at a predetermined terminal of the card connector 47. When the PC card 43 is not attached to the card connector 47, Step 103 is executed in which a warning indication, informing that the PC card 43 is not attached, is turned ON in the condition indicating device 55. Conversely, when the PC card 43 is attached, Step 104 is executed in which the warning indication is turned OFF.

Then, Step 105 is executed, in which it is determined whether a blank recording area, which is large enough to record an image data of one frame, exists in the PC card 43. The size of the blank recording area is recognized by reading information recorded in a header of the PC card 43. When there is no sufficient blank recording area, Step 106 is executed, in which a warning indication, for informing that there is no sufficient blank recording area, is turned ON in the condition indicating device 55. Conversely, when there is a sufficient blank recording area, Step 107 is executed in which the warning indication is turned OFF.

Therefore, when the PC card 43 is attached and there

is a sufficient blank recording area in the PC card 43, Steps 102, 104, 105 and 107 are executed in order and the process then goes to Step 108. Firstly, under condition that the PC card 43 is attached and has sufficient blank recording area, Step 108 and the following Steps are described below.

In Step 108, it is determined whether the photographing mode flag F1 is "0". When Step 108 is executed for the first time, since the photographing mode flag F1 is set to "0" in Step 101, the process goes to Step 111, in which the photographing mode flag F1 is changed to "1" indicating a normal photographing mode. Then, in Step 112, a blank photographing mode indication, informing that the blank photographing mode is set, is turned OFF in the condition indicating device 55.

In Step 113, it is determined whether a non-record flag F2 is "1". The non-record flag F2 is set to "1" when there is any image data, which is not recorded in the PC card 43 but stored in the buffer memory 40. The non-record flag F2 is set to "0" when there is no image data, which is stored in the buffer memory 40 and has not yet been recorded in the PC card 43. When the non-record flag F2 is "1", Step 114 is executed in which the position of the record switch 98, which is provided for transmitting image data stored in the buffer memory 40 to the PC card 43, is read. In Step 115, the position of the record switch 98 is judged, so that, when the image data is to be recorded in the PC card 43, Steps 116, 117 and

Step 118 are executed. Conversely, when the image data is not to be recorded in the PC card 43, Steps 116 and 117 are skipped and Step 118 is executed.

In Step 116, the image data is read from the buffer memory 40 and recorded in the PC card 43. In Step 117, the non-record flag F2 is set to "0".

In Step 118, it is determined whether the photometry switch 53 is set to an ON-state. When the photometry switch 53 is turned OFF, the process goes back to Step 102, and when the photometry switch 53 is turned ON, Step 119 is executed in which it is determined whether the release switch 54 is turned ON. When the release switch 54 is not turned ON, the process goes back to Step 102, and when the release switch 54 is turned ON, the process goes to Step 131, so that a photographing operation is performed.

In Step 131, an exposure is started. Namely, based on photometry data sensed by the photometry sensor 52, the opening degree of the aperture 16 is adjusted, and the shutter speed is calculated. Then, the quick return mirror 21 is rotated to a horizontal state and the shutter 25 is opened, so that the exposure is started. In Step 132, it is determined whether the exposure period corresponding to the shutter speed calculated in Step 131 has elapsed. When the exposure period has elapsed, the process goes to Step 133, in which an image signal is read from the CCD 33 and is converted to a digital

signal by the A/D converter 38. Then, the digital signal is subjected to a predetermined image process in the image signal processing circuit 39 and stored in the buffer memory 40 as digital image data. Further, the digital image data is output
5 to the liquid crystal display drive circuit 44, so that a still image is indicated on the liquid crystal display panel 46.

In Step 134, the non-record flag F2 is set to "1", since the image data has been stored in the buffer memory 40 in Step 133. In Step 135, it is determined whether the photographing mode flag F1 is "1". When the photographing mode flag F1 is "1", i.e. when the normal photographing mode is set, Step 136 is executed in which the image data is read from the buffer memory 40 and recorded in the PC card 43. In Step 137, the non-record flag F2 is set to "0" so as to indicate that no
10 image data is stored in the buffer memory 40 and the photographing operation control routine ends. Conversely, when the photographing mode flag F1 is "0", Steps 136 and 137 are skipped, and the routine ends
15

As described above, when the process goes from Step 108 to Step 111, the photographing mode flag F1 is set to "1" so that the normal photographing mode is performed. Then, if image data is stored in the buffer memory 40 (i.e. if the non-record flag F2 is "1"), the image data is transmitted to the PC card 43 in Step 116 and the process goes to Step 118
20 so that a photographing operation can be performed.
25

Conversely, if image data is not stored in the buffer memory 40 (i.e. if the non-record flag F2 is "0"), the process goes to Step 118 without performing Steps 114 through 117 so that a photographing operation can be performed. In the
5 photographing operation, after the image data is stored in the buffer memory 40 in Step 133, the image data is read from the buffer memory 40 and recorded in the PC card 43 in Step 136.

Further, in the normal photographing mode, if it is sensed
10 in Step 118 that the photometry switch 53 is switched OFF, or if it is sensed in Step 119 that the release switch 54 is switched OFF, Step 102 is again executed. Then, after Steps 104, 105 and 107 are executed, it is determined in Step 108 that the photographing mode flag F1 is "1", and therefore Steps
15 109 and 110 are executed. Namely, in Step 109, the setting of the photographing mode set switch 97 is read, and in Step 110, it is determined whether a blank photographing mode is selected. When the blank photographing mode is selected, the process goes to Step 121, and when the blank photographing
20 mode is not selected, i.e. when the normal photographing mode is set, the process goes to Step 111.

In Step 121, the photographing mode flag F1 is changed to "0" which indicates the blank photographing mode. In Step 122, the blank photographing mode indicator, to inform that
25 the blank photographing mode is set, is turned ON in the

condition indicating device 55. In Step 123, it is determined whether the non-record flag F2 is "1". When the non-record flag F2 is "1", i.e. when image data is stored in the buffer memory 40, the process goes to Step 124, in which a warning message is indicated in the condition indicating device 55, informing that, if the photographing operation is carried out, new image data will overwrite the buffer memory 40. When the non-record flag F2 is "0", Step 124 is skipped.

Then, Steps 118 and 119 are executed, in which, as described above, if the photometry switch 53 and the release switch 54 are turned ON, the process goes to Step 131. In the blank photographing mode, Steps 131 through 135 are executed and Steps 136 and 137 are not executed since the photographing mode flag F1 is "0". Namely, in the blank photographing mode, a photographed image data is stored only in the buffer memory 40 and is not recorded in the PC card 43.

On the other hand, if the photometry switch 53 or the release switch 54 is switched to the OFF position in the blank photographing mode, the process goes back from Step 118 or 119 to Step 102, so that Steps 104, 105, 107 and 108 are repeated. In this case, since the photographing mode flag F1 is switched to "0" in Step 121, the process goes from Step 108 to Step 111, the photographing mode flag F1 is again switched to "1". Then, Step 112 and the following Steps are executed.

Thus, when the PC card 43 is installed and a blank recording area, which is large enough to record image data of one frame, exists in the PC card 43, a photographing operation is carried out in the normal photographing mode in Steps 111 through 119, and 131 through 137, or a photographing operation is carried out in the blank photographing mode in Steps 121 through 124, 118, 119, and 131 through 135. During the photographing operation, if the photometry switch 53 or the release switch 54 is switched to the OFF-state, the process goes back to Step 102, so that, when the normal photographing mode is set, the process goes from Step 108 to Step 109, and Step 110 is executed. Accordingly, the photographing mode can be changed to the blank photographing mode.

On the other hand, when it is sensed in Step 102 that the PC card 43 is not installed, a message is indicated by the condition indicating device 55 and the process goes from Step 103 to Step 121, so that the blank photographing mode is performed. Similarly, when it is sensed in Step 105 that no sufficient blank recording area exists in the PC card 43, Step 106 is executed in which a message warning that there is no sufficient blank recording area is indicated by the condition indicating device 55, and the process goes to Step 121, so that the blank photographing mode is performed.

Thus, when the PC card 43 is not attached, or when there is not sufficient blank recording area in the PC card 43, a

photographing operation is automatically performed in accordance with the blank photographing mode.

Therefore, according to the embodiment, when a test photographing is carried out, it is not necessary to install the PC card 43 in the electronic still camera and the photographing operation ends while the image data is stored in the buffer memory 40. Namely, an operation does not have to be performed, in which the image data is transferred from the buffer memory 40 to the PC card 40 so that the image data is recorded in the PC card 40, and thus the test photographing operation can be repeatedly and promptly carried out. Further, even if the size of the blank recording area of the PC card 43 installed in the electronic still camera is not sufficient, the blank photographing mode is automatically selected and the photographing operation ends by storing the image data in the buffer memory 40. After that, the operator can install a PC card having sufficient memory in the electronic still camera, and can then operate the record switch 98 so that only a recording operation is carried out. Therefore, even if there is not sufficient time for changing the PC card, a photographing operation can be performed, and thus the operator has not missed a shutter chance.

Although the embodiments of the present invention have been described herein with reference to the accompanying drawings, obviously many modifications and changes may be made

by those skilled in this art without departing from the scope of the invention.

The present disclosure relates to subject matter contained in Japanese Patent Application No. 11-272512 (filed on September 27, 1999) which is expressly incorporated herein, by reference, in its entirety.

5

CLAIMS

1. A photographing operation control device for an electronic still camera, comprising:

5 a buffer memory in which an image data obtained through a photographing optical system is temporarily stored; and a blank photographing operation performing processor that performs a photographing operation in a blank photographing mode in which said image data is stored only in said buffer memory.

10 2. A device according to claim 1, further comprising a photographing mode selecting processor that sets said blank photographing mode.

15 3. A device according to claim 2, wherein said photographing mode selecting processor comprises a photographing mode set switch, by which said blank photographing mode is set, and which is provided in a camera body of said electronic still camera.

20 4. A device according to claim 1, further comprising a recording medium sensing processor that senses whether a recording medium is mounted, said blank photographing operation performing processor performing a photographing operation in said blank photographing mode when said recording medium sensing processor senses that said recording medium is not mounted.

25 5. A device according to claim 1, further comprising a blank

recording area sensing processor that senses whether a blank recording area exists in a recording medium, said blank photographing operation performing processor performing said photographing operation in said blank photographing mode when
5 said blank recording area sensing processor senses that said recording medium has no blank recording area.

6. A device according to claim 1, further comprising a recording medium sensing processor that senses whether a recording medium is mounted, a blank recording area sensing
10 processor that senses whether a blank recording area exists in said recording medium, a normal photographing operation performing processor that performs a photographing operation in a normal photographing mode in which, after storing said image data in said buffer memory, said image data is read from
15 said buffer memory and recorded in said recording medium, and a photographing mode selecting processor that selects one of said blank photographing mode and said normal photographing mode, said photographing mode selecting processor being able to select said blank photographing mode when said recording
20 medium sensing processor and said blank recording area sensing processor sense that a recording medium having a blank recording area is installed in said device.

7. A device according to claim 1, further comprising an image data transfer processor that transfers said image data
25 stored in said buffer to a recording medium.

8. A device according to claim 7, further comprising a normal photographing operation performing processor that performs a photographing operation in a normal photographing mode in which, after storing said image data in said buffer memory, reads said image data from said buffer memory, and records said image data in said recording medium, said image data transfer processor transfers said image data to said recording medium when said normal photographing mode is set.

9. A device according to claim 1, further comprising a mode informing processor that informs that said blank photographing mode is set.

10. A device according to claim 1, further comprising a recording medium sensing processor that senses whether a recording medium is mounted and a non-mounting condition informing processor that informs that said recording medium is not mounted.

11. A device according to claim 1, further comprising a blank recording area sensing processor that senses whether a blank recording area exists in a recording medium and a non-existing condition informing processor that informs that said recording medium has no blank recording area.

PHOTOGRAPHING OPERATION CONTROL DEVICE
FOR ELECTRONIC STILL CAMERA

5

ABSTRACT OF THE DISCLOSURE

10 A photographing operation control device comprises a
buffer memory in which image data is temporarily stored. In
a blank photographing mode, when a release switch is turned
ON, image data obtained through a photographing optical system
is stored in the buffer memory. In the blank photographing
mode, the image data stored in the buffer memory is not recorded
in a PC card. In a normal photographing mode, when the release
15 switch is turned ON, the image data is stored in the buffer
memory and then transmitted to the PC card, in which the image
data is recorded.

1 / 5
FIG. 1



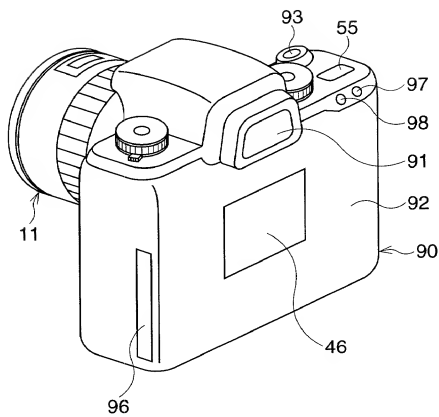



FIG. 2

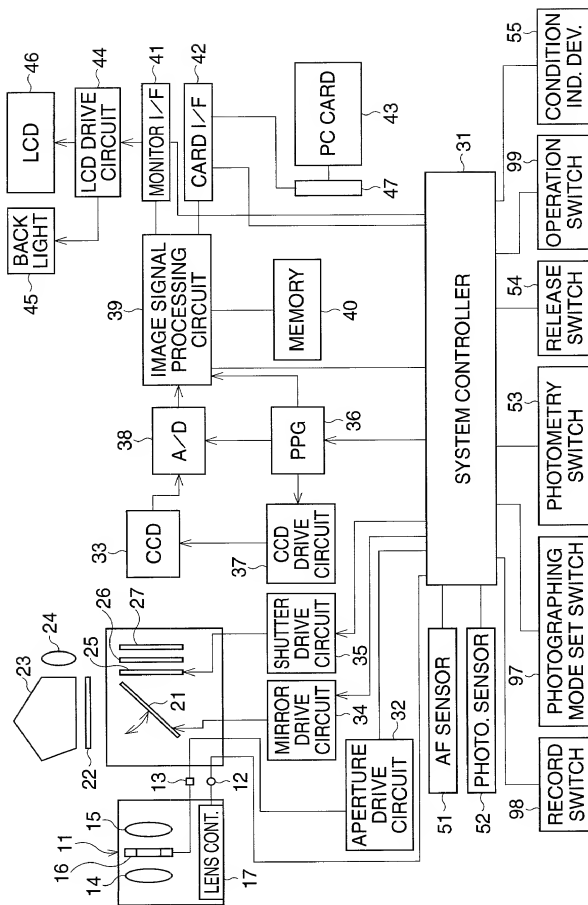


3 / 5
FIG. 3A

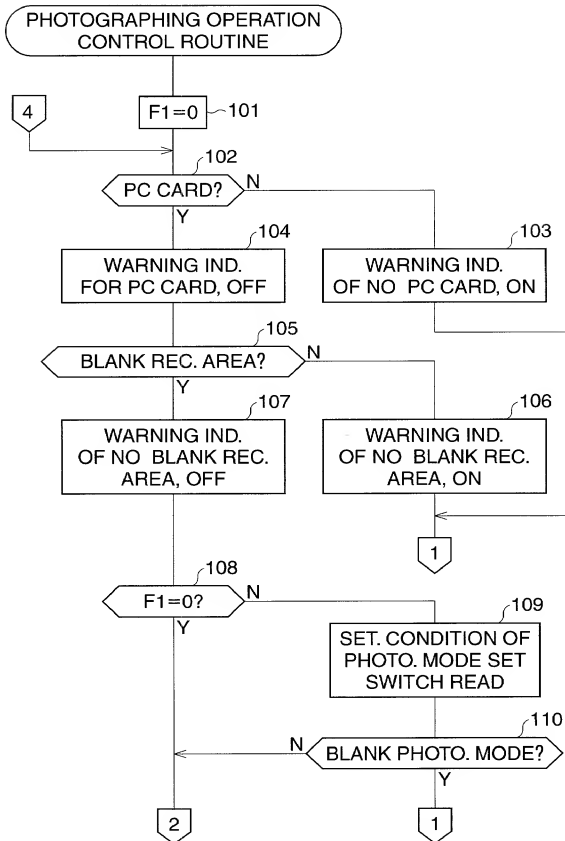

4 / 5
FIG. 3B

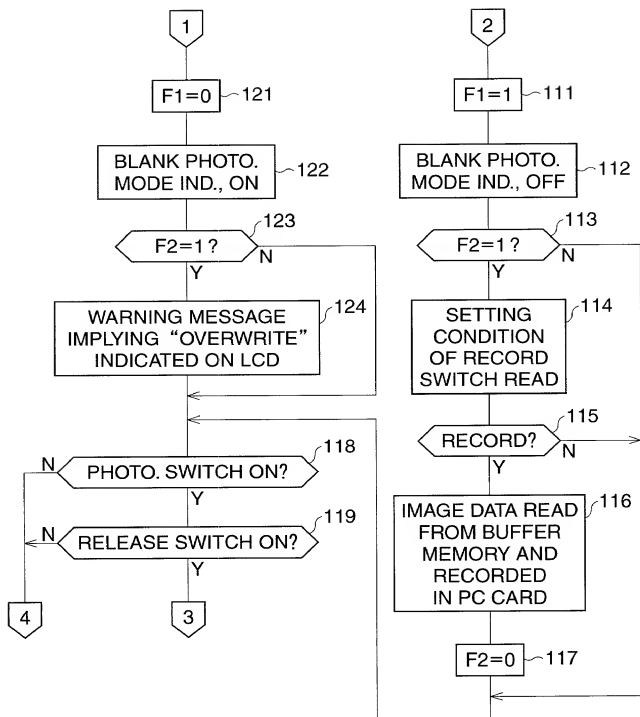

5 / 5
FIG. 3C

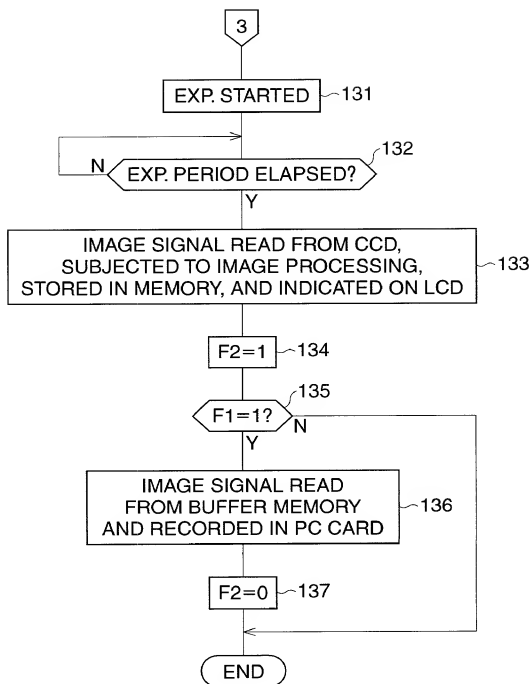

Declaration and Power of Attorney For Utility or Design Patent Application

特許出願宣言書

Japanese Language Declaration

私は、下欄に氏名を記載した発明者として、以下のとおり
宣言する：

私の住所、郵便の宛先および国籍は、下欄に氏名に続いて記載したとおり
であり、

名称の発明に関し、請求の範囲に記載した特許を求める主題の本来の、
最初にして唯一の発明者である（一人の氏名のみが下欄に記載されている
場合）か、もしくは本来の、最初にして共同の発明者である（複数の氏名が
下欄に記載されている場合）と信じ、

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated
below next to my name.

I believe I am the original, first and sole inventor (if only one name is
listed below) or an original, first and joint inventor (if plural names
are listed below) of the subject matter which is claimed and for
which a patent is sought on the invention entitled

PHOTOGRAPHING OPERATION CONTROL DEVICE FOR ELECTRONIC STILL CAMERA

the specification of which

(check one)

☒ is attached hereto.

☐ was filed on _____ as

Application No. _____

and was amended on _____

(if applicable)

I hereby state that I have reviewed and understand the contents of
the above identified specification, including the claims, as amended
by any amendment referred to above.

I acknowledge the duty to disclose information which is material to
the examination of this application in accordance with Title 37, Code
of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States
Code §119(a-d) or §365(b) of any foreign application(s) for patent
or inventor's certificate, or §365(a) of any PCT international
application which designated at least one country other than the
United States of America, listed below and have also identified
below, by checking the "No" box, any foreign application for patent
or inventor's certificate, or of any PCT international application having
a filing date before that of the application on which priority is claimed:

Prior foreign applications

先の外国出願

P11-272512

(Number)
(番号)

Japan

(Country)
(国名)

27/September/1999

(Day/Month/Year Filed)
(出願の年月日)

(Number)
(番号)

(Country)
(国名)

(Day/Month/Year Filed)
(出願の年月日)

(Number)
(番号)

(Country)
(国名)

(Day/Month/Year Filed)
(出願の年月日)

Priority claimed

優先権の主張

☒ Yes

☐ No

あり なし

☐ Yes

☐ No

あり なし

☐ Yes

☐ No

あり なし

Japanese Language Utility or Design Patent Application Declaration

☐ その他の外国特許出願番号は別紙の追補優先権欄にて記載する。

☐ Additional foreign application numbers are listed on a supplemental priority sheet attached hereto.

私は、合衆国法典第35部第119条(e)項に基づく、下記の合衆国仮特許出願の利益を主張する。

I hereby claim the benefit under Title 35, United States Code §119(e) of any United States provisional application(s) listed below.

(Number)
(番号) (Day/Month/Year Filed)
出願の年月日

(Number)
(番号) (Day/Month/Year Filed)
出願の年月日

(Number)
(番号) (Day/Month/Year Filed)
出願の年月日

☐ その他の合衆国仮特許出願番号は別紙の追補優先権欄にて記載する。

☐ Additional provisional application numbers are listed on a supplemental priority sheet attached hereto.

私は、合衆国法典第35部第120条に基づく下記の合衆国特許出願、又は第365条(c)項に基づく合衆国を指名したPCT国際出願の利益を主張し、本願の請求の範囲各項に記載の主題が合衆国法典第35部第112条第1項規定の態様で、先の合衆国特許出願又はPCT国際出願に開示されていない程度に於いて、先の出願の出願日と本願の国内出願日又はPCT国際出願日の間に有効となった連邦規則法典第37部第1章第56条に記載の特許要件に所要の情報を開示すべき義務を有することを認める。

I hereby claim the benefit under Title 35, United States Code §120 of any United States application(s), or §365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of Title 35, United States Code §112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

(Application No.)
(出願番号) (Day/Month/Year Filed)
(出願の年月日)

(Application No.)
(出願番号) (Day/Month/Year Filed)
(出願の年月日)

(現況)
(特許済み、係属中 放棄済み) (Status)
(patented, pending, abandoned)

(現況)
(特許済み、係属中 放棄済み) (Status)
(patented, pending, abandoned)

☐ その他の合衆国又は国際特許出願番号は別紙の追補優先権欄にて記載する。

☐ Additional U.S. or international application numbers are listed on a supplemental priority sheet attached hereto.

私は、ここに自己の知識のもとで行った陳述がすべて真実であり、自己の所有する情報および信ずるところに従って行った陳述が真実であると信じ、さらに故意に虚偽の陳述等を行った場合、合衆国法典第18部第1001条により、罰金もしくは禁錮に処せられるか、またはこれらの刑が併科され、またかたかたの故意による虚偽による陳述が本願ないし本願に対して付与される特許の有効性を損なうことがあることを認識して、以上の陳述を行ったことを宣言する。

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

私、下記署名者は、ここに記載の米国弁護士または代理人に本出願に関し特許商標庁にて取られるいかなる行為に関して、同米国弁護士又は代理人が、私に直接連絡なしに私の外国弁護士或いは法人代表者からの指示を受け取り、それに従うようここに委任する。この指示を出す者が変更の場合には、ここに記載の米国弁護士又は代理人にその旨通知される。

The undersigned hereby authorizes the U.S. attorney or agent named herein to accept and follow instructions from either his foreign patent agent or corporate representative, if any, as to any action to be taken in the Patent and Trademark Office regarding this application without direct communication between the U.S. attorney or agent and the undersigned. In the event of a change in the persons from whom instructions may be taken, the U.S. attorney or agent named herein will be so notified by the undersigned.

Japanese Language Utility or Design Patent Application Declaration

委任状: 私は、下記発明者として、下記に明記された顧客番号を伴う以下の弁護士又は、代理人をここに選任し、本願の手続きを遂行すること並びにこれに関する一切の行為を特許商標庁に対して行うことを委任する。そして全ての通信はこの顧客番号宛に発送される。

顧客番号 7055

現在選任された弁護士は下記の通りである。

Neil F. Greenblum
Bruce H. Bernstein
Roger P. Glass
James L. Rowland
Arnold Turk

POWER OF ATTORNEY: As a named inventor, I hereby appoint the attorney(s) and/or agent(s) associated with the Customer Number provided below to prosecute this application and transact all business in the Patent and Trademark Office connected therewith, and direct that all correspondence be addressed to that Customer Number:

CUSTOMER NUMBER 7055

The appointed attorneys presently include:

Reg. No. 28,394
Reg. No. 29,027
Reg. No. 30,841
Reg. No. 32,674
Reg. No. 33,094

Address: GREENBLUM & BERNSTEIN, P.L.C.
1941 ROLAND CLARKE PLACE
- RESTON, VA 20191

直接電話連絡先: (名称および電話番号)

Direct Telephone Calls to: (name and telephone number)

GREENBLUM & BERNSTEIN, P.L.C.

(703) 716-1191

唯一のまたは第一の発明者の氏名		Full name of sole or first inventor Koichi SATO	
同発明者の署名	日付	Inventor's signature Koichi Sato	Date Sep. 13, 2000
住所		Residence Saitama, Japan	
国籍		Citizenship Japan	
郵便の宛先		Post Office Address c/o ASAHI KOGAKU KOGYO KABUSHIKI KAISHA 36-9, Maenocho 2-chome, Itabashi-ku, Tokyo, Japan	
第2の共同発明者の氏名 (該当する場合)		Full name of second joint inventor, if any	
同第2共同発明者の署名	日付	Second Inventor's signature	Date
住所		Residence	
国籍		Citizenship	
郵便の宛先		Post Office Address	

(第六またはそれ以降の共同発明者に対しても同様な情報および署名を提供すること。)

(Supply similar information and signature for third and subsequent joint inventors.)